
Professionale pentru echipamente profesionale




heating elements


immersion heating elements




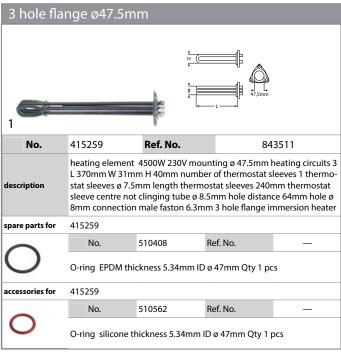


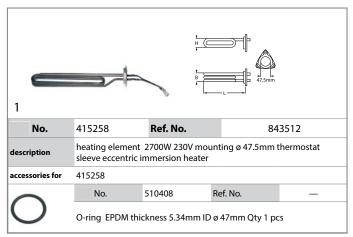

accessories for	415258			
	No.	521012	Ref. No.	_
0	gasket graphite ED ø 15mm ID ø 5mm thickness 1.2mm Qty 1 pcs			

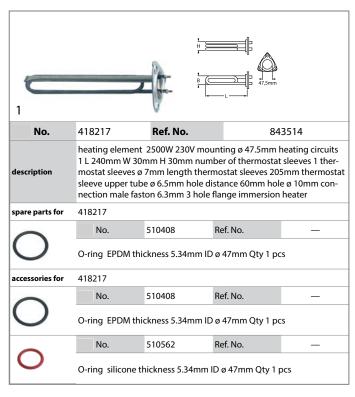









Accessories Sealing washers O-rings No. 528902 Ref. No. 839701 description O-ring EPDM thickness 3.53mm ID ø 66.27mm Qty 1 pcs

thermostats

control and safety thermostats

EGO

control thermostats

55.10/19 series



I	No.	390065	Ref. No.	843621 843625
	description	probe ø 11mm pro isolated 1000mm	bbe L 28mm capilla gland nut shaft ø ø	range 30-90°C 1-pole 1CO 16A ry pipe 1000mm capillary pipe 6x4.6mm shaft L 23mm shaft n probe probe thread M14x1



position upper rotation 270° probe material SS

isolated 1940mm gland nut shaft ø ø6x4.6mm shaft L 23mm shaft

IMIT / TEMPOMATIC / ARTHERMO control thermostats No. 375403 Ref. No. 843630 thermostat t.max. 90°C temperature range 30-90°C 1-pole 1CO 15A probe ø 6mm probe L 90mm capillary pipe 1500mm capillary pipe isolated 1400mm gland nut shaft ø 6x4.6mm shaft L 15mm shaft position upper rotation 270° probe material SS

switches and momentary switches


rocker/momentary rocker switches

30x22mm




No.	301036	Ref. No.	844600
description	protective cover internal size 30x22mm for rocker switch mo measurementsmm		nm for rocker switch mounting

No.	346474	Ref. No.	829533	
description dummy element external size 30x22mm suitable for rocker switch				



blank				
1				
No.	345983	Ref. No.	84	4103
description	momentary rocker switch mounting measurements 30x22mm green 2NO 250V 16A illuminated 0-I connection male faston 6.3mm ambient temperature max. 85°C protection IP65 with cover cap			
accessories for	345983			
1	No.	301036	Ref. No.	844600
	protective cover measurementsm		2mm for rocker sv	vitch mounting



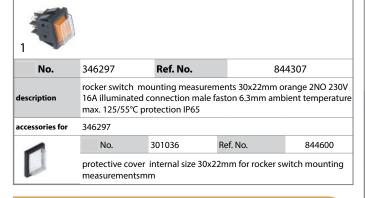


push/momentary push switches

28.5x52.6mm No. 347441 Ref. No. 844107 double momentary switch mounting measurements 28.5x52.6mm black/green 1NO/indicator light 250V 16A washing cycle connection male faston 6.3mm ambient temperature max. 85°C protection IP40











30x22mm No. 301036 Ref. No. 844600 description protective cover internal size 30x22mm for rocker switch mounting measurementsmm

accessories

blank elements



No.	347442	Ref. No.	829535
description	dummy element b	olack mounting me	asurements 28.5x52.6mm

microswitches

pin-plunger actuated

M10



No.	345032	Ref. No.	844301
description	1CO connection m	ale faston 6.3mm s	0x1 thread L 12mm 250V 16A troke 7mm mounting distance max. 125°C type SP9603 actua-

lamps


indicator lights

indicator lights (complete)

30x22mm



No.	346965	Ref. No.	844899
description	indicator light, mo	unting measureme	nts 30x22mm 230V vellow

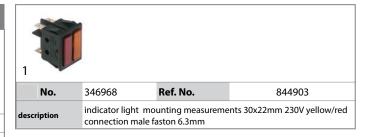

timers


programme timers




No.	360244	Ref. No.	84	2129	
description		timer CDC 7803 engines 1 chambers 3 operation time 20min 230V manuf. no. 7803F1 / 907173 motor type M37RN			
spare parts for	360244	360244			
60	No.	360119	Ref. No.	_	
NO.	motor CDC pinion ø 5.4mm teeth 12 230V turn direction right motor				



No.	360404	Ref. No.	84	2125
description	timer CDC 7804 engines 1 chambers 4 operation time 5min 230V			
spare parts for	360404			
	No.	360119	Ref. No.	_
	motor CDC pinion ø 5.4mm teeth 12 230V turn direction right motor ø 37mm motor type M37RN for timer			

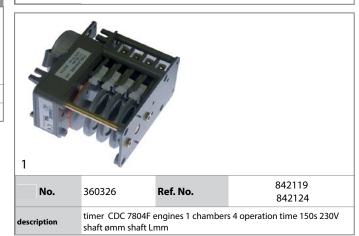







contactors

miscellaneous





No.	380852	Ref. No.	842501 842503
description			20A (AC3/400V) 9A/4kW 1NO connection screw type

electronics

PCR_s





1						
No.	403219	Ref. No.	842130			
description	PCB warewas ELH.0	hing TS420/TS820 L 73n	nm W 66mm for timer type			

solenoid valves

solenoid valves (water)

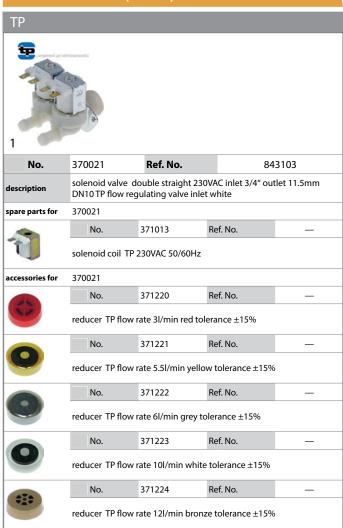


Table continues overleaf





accessories for	370021						
AVA	No.	371225	Ref. No.	_			
414	reducer TP flov	v rate 16l/min ligh	nt brown tolerance ±	15%			
270	No.	371226	Ref. No.	_			
W. W.	reducer TP flov	v rate 20l/min red	tolerance ±15%				
4	No.	371230	Ref. No.	_			
	reducer TP flov	v rate 0.25l/min re	ed tolerance ±25%				
-	No.	371231	Ref. No.	_			
	reducer TP flov	v rate 0.35l/min v	iolet tolerance ±25%				
.	No.	371232	Ref. No.	_			
	reducer TP flov	reducer TP flow rate 0.5l/min orange tolerance ±25%					
-	No.	371233	Ref. No.				
	reducer TP flow rate 0.8l/min white tolerance ±25%						
-	No.	371234	Ref. No.				
	reducer TP flow rate 1l/min light blue tolerance ±25%						
-	No.	371235	Ref. No.				
	reducer TP flow rate 1.2l/min brown tolerance ±25%						
-	No.	371236	Ref. No.	_			
	reducer TP flow rate 1.5I/min light brown tolerance ±25%						
2	No.	371237	Ref. No.				
	reducer TP flow rate 2.5l/min yellow tolerance ±25%						
-	No.	371238	Ref. No.				
	reducer TP flow rate 3.4l/min dark green tolerance ±25%						
	No.	371239	Ref. No.				
	reducer TP flow rate SI/min black tolerance ±25%						
	No.	371240	Ref. No.	_			
	reducer TP flov	v rate 8l/min blue	tolerance ±20%				



1						
No.	370017	Ref. No.		843101		
description		solenoid valve single straight 230VAC inlet 3/4" outlet 11.5mm DN10 TP p max 10bar				
spare parts for	370017	370017				
	No.	371013	Ref. No.	_		
1	solenoid coil	solenoid coil TP 230VAC 50/60Hz				
accessories for	370017					
	No.	371220	Ref. No.	_		
	reducer TP flow rate 3I/min red tolerance ±15%					
	No.	371221	Ref. No.	_		
	reducer TP flow rate 5.5l/min yellow tolera					

accessories for	370017						
	No.	371222	Ref. No.	_			
	reducer TP flow rate 6I/min grey tolerance ±15%						
	No.	371223	Ref. No.	_			
0	reducer TP flow	rate 10l/min white	e tolerance ±15%				
44	No.	371224	Ref. No.	_			
	reducer TP flow	rate 12l/min bron	ze tolerance ±15%)			
AVA	No.	371225	Ref. No.	_			
	reducer TP flow	rate 16l/min light	brown tolerance ±	:15%			
616	No.	371226	Ref. No.	_			
	reducer TP flow	rate 20l/min red t	olerance ±15%				
<u> </u>	No.	371230	Ref. No.	_			
	reducer TP flow rate 0.25l/min red tolerance ±25%						
	No.	371231	Ref. No.	_			
	reducer TP flow rate 0.35l/min violet tolerance ±25%						
<u></u>	No.	371232	Ref. No.	_			
	reducer TP flow rate 0.5l/min orange tolerance ±25%						
-	No.	371233	Ref. No.	_			
	reducer TP flow rate 0.8l/min white tolerance ±25%						
	No.	371234	Ref. No.	_			
	reducer TP flow rate 1l/min light blue tolerance ±25%						
	No.	371235	Ref. No.	_			
	reducer TP flow rate 1.2l/min brown tolerance ±25%						
	No.	371236	Ref. No.	_			
	reducer TP flow	rate 1.5l/min light	brown tolerance	±25%			
<u></u>	No.	371237	Ref. No.	_			
	reducer TP flow	rate 2.5l/min yello	ow tolerance ±25%)			
	No.	371238	Ref. No.	_			
	reducer TP flow	rate 3.4l/min dark	green tolerance ±	25%			
	No.	371239	Ref. No.	_			
	reducer TP flow	rate 5l/min black	tolerance ±25%				
	No.	371240	Ref. No.	_			
	reducer TP flow	rate 8l/min blue t	olerance ±20%				



pressure switches

for warewashing

ø 58mm with male faston 6.3mm

with connection horizonta



No.	541251	Ref. No.	843303
description		essure connection	Ombar connection male faston horizontal warewashing pres-

pumps

wash and rinse pumps

ALBA (C&A)



1						
No.	500296	Ref. No.	84	1145		
description	0.11kW 0.15HP L	pump inlet ø 28mm outlet ø 28mm type C903 230V 50Hz 1 phase 0.11kW 0.15HP L 200mm rotation direction left capacitor 6.3µF auxi- liary pressure connection 13mm supporting pressure closed ALBA PUMPS (C&A)				
spare parts for	500296					
-	No.	365012	Ref. No.	_		
	temperature max		F 450V tolerance 5 0mm L 61mm M8			
	No.	510692	Ref. No.	_		
9	mechanical shaft seal for shaft ø 11mm slide ringext. ø 24mm slide ring H 13mm counter ring mounting ø 26mm height counter ring 8mm counter ring int. ø 14mm					
4	No.	521226	Ref. No.	_		
	impellor ø 72mm H 19mm thread M7R shaft ø 11mm shaft length 29mm blades 3					
	No.	521521	Ref. No.	_		
	pump cover ALBA PUMPS (C&A) inlet ø 28mm outlet ø 28mm auxiliary pressure connection 13mm supporting pressure closed turn direction left ø 93mm ID ø 76mm inner hight 31mm					
	No.	532490	Ref. No.	_		
	O-ring EPDM thi	ckness 2.62mm ID	ø 72.69mm Qty 1	pcs		



description	pump inlet ø 62mm outlet ø 50mm type C12002 230/400V 50Hz 3 phase 0.55kW 0.75HP L 320mm rotation direction right auxiliary pressure connection 12mm supporting pressure closed ALBA PUMPS (C&A)				
spare parts for	500302				
	No.	510551	Ref. No.	841519	
\bigcirc	pump cover gasket ID ø 158.3mm pump type 1214/1293/1225/2243/ 1226/1204/3473/1241 thickness 3.53mm EPDM Qty 1 pcs				
	No.	510620	Ref. No.	_	
	impellor ø 109mm H 27mm rotation direction right thread M8L blades 6				
	No.	510693	Ref. No.	_	
90	mechanical shaft seal for shaft ø 12mm slide ringext. ø 24mm slide ring H 15.5mm slide ring int. ø 11mm counter ring mounting ø 24mm height counter ring 8mm counter ring int. ø 13.5mm				
	No.	521536	Ref. No.	_	
AND DESCRIPTION OF THE PARTY OF					





1				
No.	500308	Ref. No.	84	1181
description	pump inlet ø 63mm outlet ø 48mm type C2002 230/400V 3 phase 1.1kW 1.5HP L 325mm rotation direction right auxiliary pressure connection 12mm supporting pressure closed ALBA PUMPS (C&A)			
spare parts for	500308			
	No.	510551	Ref. No.	841519
\bigcirc	pump cover gasket ID ø 158.3mm pump type 1214/1293/1225/2243/ 1226/1204/3473/1241 thickness 3.53mm EPDM Qty 1 pcs			
	No.	510620	Ref. No.	_
	impellor ø 109m	m H 27mm rotatio	on direction right t	thread M8L



spare parts for	500308			
90	No.	510693	Ref. No.	_
	mechanical shaft seal for shaft ø 12mm slide ringext. ø 24mm slide ring H 15.5mm slide ring int. ø 11mm counter ring mounting ø 24mm height counter ring 8mm counter ring int. ø 13.5mm			
(8)	No.	521536	Ref. No.	_
	pump cover ALBA / LGB inlet ø 62mm outlet ø 50mm auxiliary			

pump cover ALBA / LGB inlet ø 62mm outlet ø 50mm auxiliary pressure connection 12mm supporting pressure closed turn direction right ø 180mm ID ø 150mm inner hight 38mm

FIR

pumps



No.	500035	Ref. No.	84	841151			
description	phase 0.55kW 0.7	pump inlet ø 63mm outlet ø 47mm type 1293.1402 230V 50Hz 1 phase 0.55kW 0.75HP L 295mm rotation direction right capacitor 12.5µF FIR inlet ø 63mm outlet ø 48mm					
spare parts for	500035						
	No.	365014	Ref. No.	_			
operating capacitor capacity 12.5µF 450V tolerance 5%l temperature max25 to +85°C ø 35mm L 70mm M8 plas on male faston 6.3mm 45S.C3DS.12.5 protection							
	No.	510601	Ref. No.	_			
	impellor ø 103mm H 25mm rotation direction right thread M8L seat ø 12.2mm blades 6						
	No.	510693	Ref. No.	_			
90	mechanical shaft seal for shaft ø 12mm slide ringext. ø 24mm slide ring H 15.5mm slide ring int. ø 11mm counter ring mounting ø 24mm height counter ring 8mm counter ring int. ø 13.5mm						
	No.	521513	Ref. No.	_			
6	pump cover FIR inlet ø 63mm outlet ø 47mm turn direction right ID ø 150mm inner hight 32mm						
	No	524416	Rof No				

pump cover gasket thickness 4x4mm Qty 1 pcs





connection male faston 6.3mm 416.10.99 protection

O-ring EPDM thickness 2.62mm ID ø 75.87mm Qty 1 pcs

Table continues overleaf



spare parts for	500474					
	No.	509020	Ref. No.	_		
	impellor ø 104mm H 25mm M8L					
	No.	510703	Ref. No.	_		
9	mechanical shaft seal for shaft ø 13mm slide ring H 13mm height counter ring 5.5mm ED ø 26mm					
All controls	No.	521547	Ref. No.	_		
	pump cover LGB inlet ø 60mm outlet ø 50mm supporting pressure M8 turn direction right ø 160mm ID ø 127mm inner hight 36mm					
	No.	532623	Ref. No.	_		
	O-ring EPDM thickness 2.62mm ID ø 120.32mm Qty 1 pcs					



		0		0		
No.	500486	Ref. No.		84	1112	
description		pump inlet ø 60mm outlet ø 50mm type ZF400VSX 230V 50Hz 1 phase 0.7kW 0.95HP L 255mm rotation direction right capacitor 16μF LGB				
spare parts for	500486	500486				
	No.	365021	Ref. No		_	
e	ent temperatur	operating capacitor capacity 16μF 425V tolerance 5% 50/60Hz ambient temperature max25 to +85°C ø 35mm L 73mm single M8 plastic connection male faston 6.3mm 416.10.99 protection				
	No.	509020	Ref. No		_	
	impellor ø 104mm H 25mm M8L					
	No.	510703	Ref. No		_	
90	mechanical shaft seal for shaft ø 13mm slide ring H 13mm height counter ring 5.5mm ED ø 26mm					
	No.	512404	Ref. No		_	
The state of the s	bracket mounting distance 130mm					
	No.	521058	Ref. No		_	
	fanwheel cover suitable for LGB ID ø 138mm ED ø 142mm H 59mm plastic					
	No.	521547	Ref. No		_	
8	pump cover LGB inlet ø 60mm outlet ø 50mm supporting pressure M8 turn direction right ø 160mm ID ø 127mm inner hight 36mm					
	No.	532623	Ref. No		_	
\bigcirc	O-ring EPDM t	hickness 2.62mn	n ID ø 120.3	32mm Qty	1 pcs	



1 No.	500943	Ref. No.		84	1114	
description		pump inlet ø 62mm outlet ø 50mm type ZF522VSX 230V 50Hz 1 pha- se 0.7kW 0.95HP L 250mm rotation direction right capacitor 16µF LGB				
spare parts for	500943					
	No.	365021	Ref. N	lo.	_	
4	operating capacitor capacity 16µF 425V tolerance 5% 50/60Hz amb ent temperature max25 to +85°C ø 35mm L 73mm single M8 plast connection male faston 6.3mm 416.10.99 protection					
	No.	510551	Ref. N	lo.	841519	
	pump cover gasket ID ø 158.3mm pump type 1214/1293/1225/2243/ 1226/1204/3473/1241 thickness 3.53mm EPDM Qty 1 pcs					
	No.	510694	Ref. N	lo.	_	
90	mechanical shaft seal for shaft ø 13mm height counter ring 8mm ID ø 11.5mm H 16mm mounting ø 24/26mm int. ø 1 14mm					
	No.	521239	Ref. N	lo.	_	
6	impellor ø 110mm H 26mm rotation direction right thread M8L shaft ø 19.5mm shaft length 17mm seat ø 8.2mm blades 6					
	No.	521536	Ref. N	lo.	_	
8	pump cover ALBA / LGB inlet ø 62mm outlet ø 50mm auxiliary pressure connection 12mm supporting pressure closed turn direction right ø 180mm ID ø 150mm inner hight 38mm					

drain pumps







equipment-specific units

for dishwashers

drain and intake components


TEIKOS


drain /intake bodies





No.	507419	Ref. No.	835105
description	drain fitting angle	ed thread 3/4" hose	ø 25mm








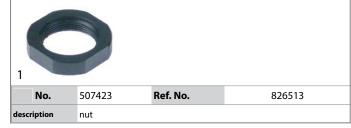




















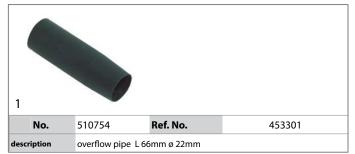




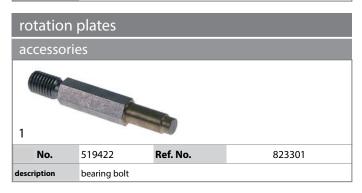










softener cartridges softening columns 1 No. 530000 Ref. No. 843401 843403 description softener 4-fold L 380mm W 180mm






























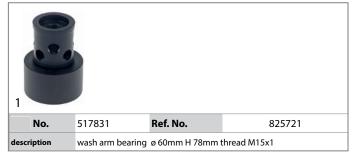























miscellaneous			
1 6			
No.	510786	Ref. No.	826110
description	rinse jet		





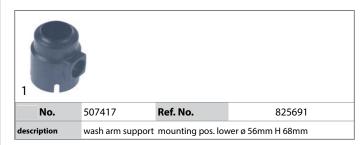

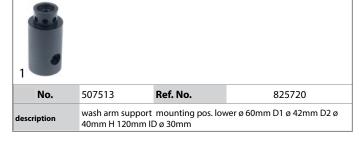


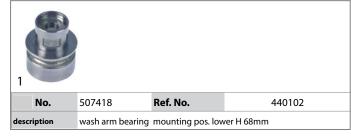

rinse arm shafts				
1=				
No.	507421	Ref. No.	449327 849327	
description	rinse arm sha M15x1	rinse arm shaft mounting pos. lower ø 15mm H 146mm thread M15x1		


equipment feet and end caps


screw-in feet

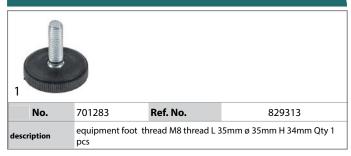


gaskets


O-rings






















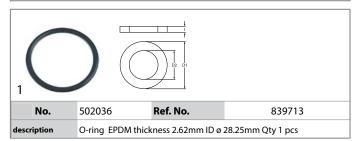






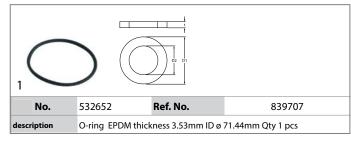





dosing pumps

peristaltic dosing pumps

MICRODOS

microdos



description	dosing pump MICRODOS time control 3I/h 230VAC detergent hose ø 4x6mm hose Santoprene suction level 1.5m horizontal/vertical type MP3-T dosing time 1-25s			
spare parts for	361000			
	No.	361284	Ref. No.	_
di do	pump hose detergent ID ø 6.25mm ED ø 10.55mm hose ø 4x6mm hose type Santoprene with connections Shore 55°			
1	No.	361514	Ref. No.	_
	roller assembly detergent hose type Santoprene beige			
	No.	361549	Ref. No.	_
	pump hose detergent ID ø 6mm ED ø 10.5mm hose ø 10.5mm hose ø 6mm hose type Santoprene L 1000mm dosing Qty 1m Shore 55°			

843895





membrane dosing pumps

self-priming

SEKO



No.

361241

Ref. No.

hose connector 1-way hose ø 9mm plastic connection M10x1

1						
No.	361217	Ref. No.		84	3901 13911 14905	
description		type DIB3E rins on ø 4x6mm suc			³ per stroke pres mm SEKO	
spare parts for	361217					
	No.	361301	Re	f. No.	_	
6	hose connecto	or for type DIB3	E/DIB5E			
	No.	361302	Re	f. No.	_	
0	valve bush for	valve bush for type DIB3E/DIB5E				
	No.	361304	Re	f. No.	_	
\circ	O-ring EPDM ID ø 11.11mm thickness 1.78mm Qty 1 pcs for type DIB3E/DIB5E					
	No.	361305	Re	f. No.	_	
	valve disc for type DIB3E/DIB5E DIB3P/DIB5P					
	No.	361306	Re	f. No.	_	
	membrane for type DIB3E/DIB5E ø 49mm hole ø 5mm					
0	No.	361307	Re	f. No.	_	
	membrane dosing pump ø 68mm hole ø 6mm for type DIB3P/DIB5F					
	No.	361481	Re	f. No.	_	
	lip valve for type DIB3P/DIB5P DIB3E/DIB5E					
accessories for	361217					
44	No.	361240	Re	f. No.	_	
	hose connector 1-way hose ø 6mm plastic connection M10x1					



self-priming with supporting pressure

GERMAC

type 1000



No.	361519	Ref. No.		843917
description	dosing pump type 1000 rinse aid inlet 4x6mm outlet M10x1 pressur connection ø M10x1 IT for pipes ø 6mm suction connection ø PVC 4x6mm supporting pressure 11mm rebound ball PTFE 1mm GERMAG CODE VNR/A3			
spare parts for	361519			
	No.	361550	Ref. No.	_
	hose connecto	or hose ø 4x6mm	1	
On	No.	361551	Ref. No.	_
	compression spring wire gauge ø 1mm			
	No.	361703	Ref. No.	_
	hose connector thread M10x1 brass pipe connection ø 4x6mmmm			
	No.	361705	Ref. No.	_
O	gasket for hose connector M12x1			
	No.	510298	Ref. No.	_
	lip valve dosing pump suitable for DB2/DS5			
accessories for	361519			
	No.	361553	Ref. No.	
	membrane EPDM			
	No.	361700	Ref. No.	_



TEIKOS DOSING PUMPS/HOSES



